


- MATERIALS: FLEXIBLE TUBE (2 LAYERS): .012 ALUMINUM
INNER FITTINGS: .012 ALUMINUM
OUTER FITTINGS: .018 G-90 GALVANIZED
- FOR USE WHERE TYPE B GAS VENT IS REQUIRED
- DO NOT ENCLOSE. DO NOT PASS THROUGH COMBUSTIBLE WALLS, FLOORS, OR CEILINGS
- 1 INCH MINIMUM CLEARANCE TO COMBUSTIBLE CONSTRUCTION PER THE INSTALLATION INSTRUCTIONS
- 3, 4 AND 5 INCH DIAMETERS
- 2, 3, 4 AND 5 FOOT LENGTHS

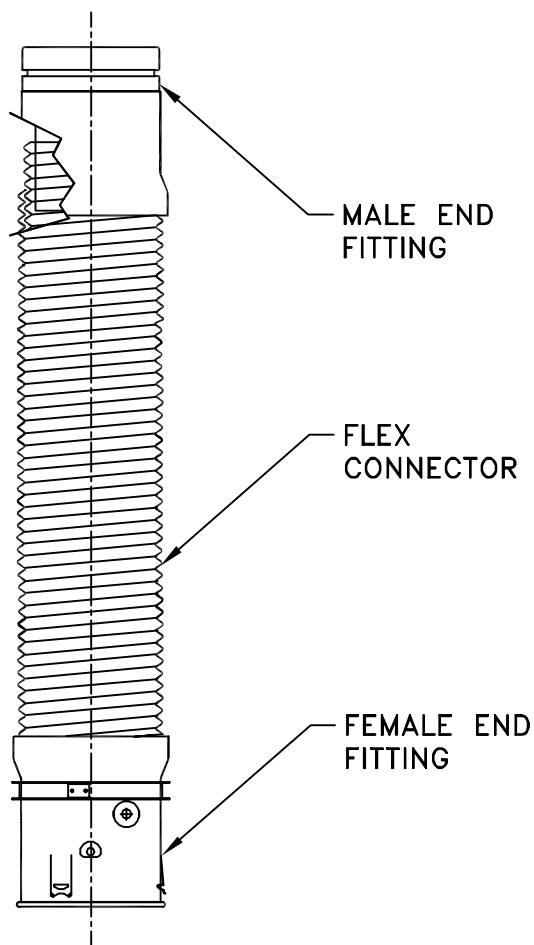

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

SUBMITTED BY: _____

DATE: 4/1/03

SD-3450

DFC
 Gas Vent Segment/
 Double Wall Flexible Connector